


78455 GLOBAL L16H (6V420/C20)



Specifications

Voltage	6V
Length	296mm
Width	176mm
Container Height	402mm
Total Height	425mm
Approx Weight	52Kg
Terminal	DT(5/16")
Container Material	PP
Rated Capacity	20HR 420Ah
	5HR 344Ah
Reserve Capacity	25A 850min
	75A 220min

Layout

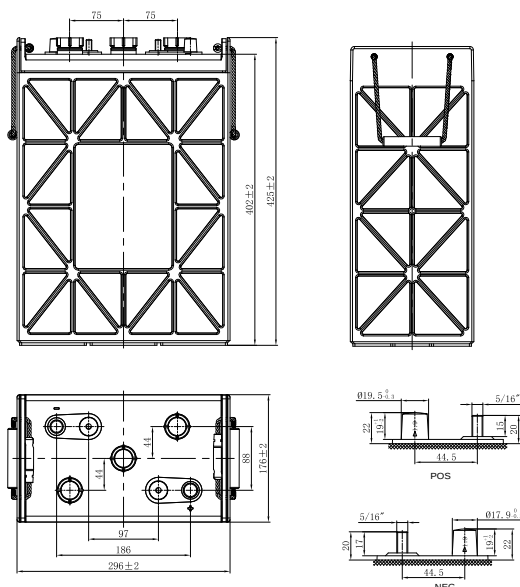


General Features

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance

APPLICATIONS

- Electric vehicle
- Cleaning equipment
- Golf cart
- AWP
- Sightseeing bus
- Marine&RV

Charging Characteristics

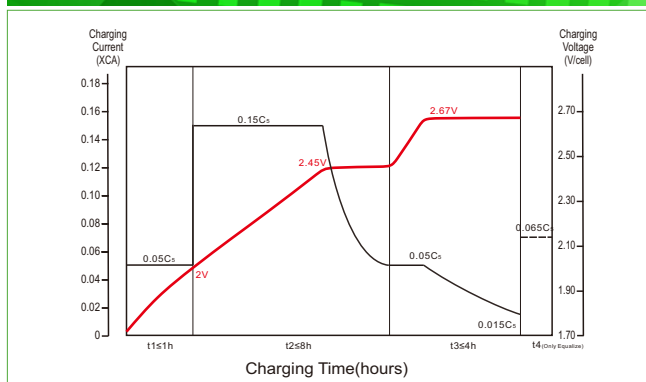

Discharge Characteristics

