






### 45535 GLOBAL GTX20CH-4(12V18Ah)



#### Specifications

|                                            |                                                                                                 |                              |
|--------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------|
| Nominal Voltage                            |                                                                                                 | 12V                          |
| Nominal Capacity (10HR)                    |                                                                                                 | 18Ah                         |
| Cold Cranking Performance Amps@0°F (-18°C) |                                                                                                 | 230A                         |
| Dimension (±2mm)                           | Length                                                                                          | 150mm (5.91inches)           |
|                                            | Width                                                                                           | 87mm (3.43inches)            |
|                                            | Container Height                                                                                | 161mm (6.34inches)           |
|                                            | Total Height                                                                                    | 161mm (6.34inches)           |
| Battery (with acid)                        | Approx Weight                                                                                   | 5.53kg (12.2lbs)             |
| Terminal type                              |                                                                                                 | A                            |
| Battery type                               | Factory Activated Series                                                                        |                              |
| Full Charge                                | Constant-Voltage Charge:                                                                        |                              |
|                                            | Initial charging current                                                                        | Less than 0.3C <sub>10</sub> |
|                                            | Voltage                                                                                         | 14.40V~15.00V at 25°C (77°F) |
|                                            | Charging time                                                                                   | 15~18h                       |
|                                            | Constant-Current Charge:                                                                        |                              |
|                                            | Charging current 0.1C <sub>10</sub> , when charging voltage up to 14.40V, continue to charge 4h |                              |
| Floating Charge                            | Initial charging current                                                                        | Unlimited                    |
|                                            | Voltage                                                                                         | 13.50V~13.80V at 25°C (77°F) |
| Capacity affected by Temperature           | 40°C (104°F)                                                                                    | 106%                         |
|                                            | 25°C (77°F)                                                                                     | 100%                         |
|                                            | 0°C (32°F)                                                                                      | 86%                          |
|                                            | -15°C (5°F)                                                                                     | 65%                          |

#### Discharge Characteristics (25°C)

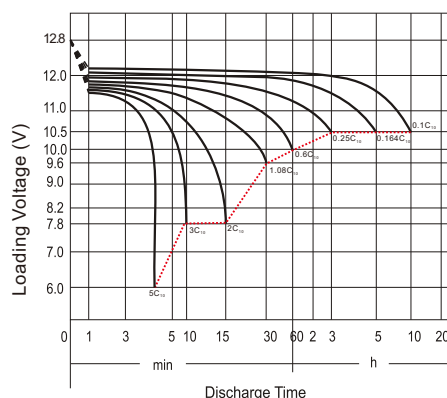

#### General Features

- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

\*Values are subject to variation of +/- 5% in normal manufacturing processes.