


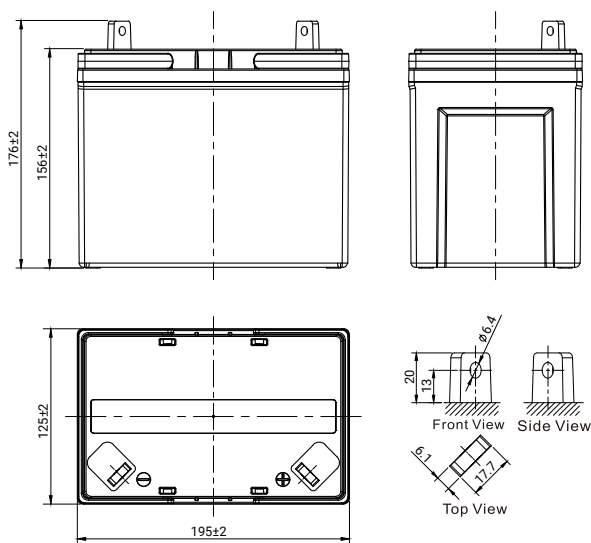

GENERAL FEATURES

- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

*Values are subject to variation of +/- 5% in normal manufacturing processes.

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	25Ah
Cold Cranking Performance Amps@0°F (-18°C)	330A
Dimension (±2mm)	Length 195mm (7.68inches)
	Width 125mm (4.92inches)
	Container Height 156mm (6.14inches)
	Total Height 176mm (6.93inches)
Battery (with acid)	Approx Weight 8.34kg (18.4lbs)
Terminal type	G
Battery type	Factory Activated Series
Full Charge	Constant-Voltage Charge:
	Initial charging current Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)
	Charging time 15~18h
	Constant-Current Charge:
	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h
Floating Charge	Initial charging current Unlimited
	Voltage 13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F) 106%
	25°C (77°F) 100%
	0°C (32°F) 86%
	-15°C (5°F) 65%

Discharge Characteristics (25°C, 77°F)

