SiGN

Smart Bulb User Guide

Part 1 : Download & Registration

- Download " SiGN Smart Home " app from APP Store or Google Play.
- Register and log in.
- Note: SiGN Smart Home APP only supports 2.4GHz Wi-Fi

1

Part 2 : Easy Mode(Recommend)

- Open the SiGN Smart Home App, tap the icon "+" at the top right -->Add Manually -->Lighting
- Smart bulb has connected with electricity, then make the bulb bilnks rapidly.
  tap "Help" on that page then know how
- Choose the local WiFi and enter the correct password, tap "Next". Wait for configuring sucessfully,then tap " Done "

2

Part 3 : AP Mode (If failed in Part 2)

- If failed in Easy mode, automatically skip to AP mode. Or tap the icon " + " at the top right ->Add Manually -->Lighting- ->Lighting-->AP Mode
- Smart bulb has connected with electricity, Make the bulb light slowly flashes.(tap "Help" then know how).
- Tap "Connect now", choose WiFi hotspot named " SiGN Smart Home -XXXX", then back to " SiGN Smart Home" application
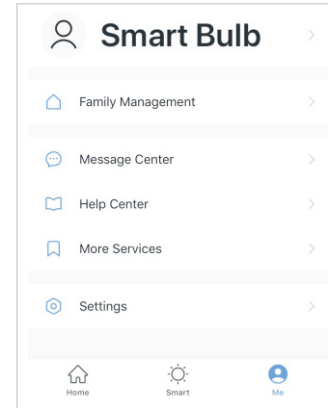
3

- Wait for configuring successfully .then tap " Done ".
Users could rename the device through tapping the icon in the middle of interface.

Part 4 : Profile

Profile is the entrance for the users to manage personal information, mainly show the following information(see chart):

4

○	**Smart Bulb**	›
⌂	Family Management	›
💬	Message Center	›
▭	Help Center	›
🔖	More Services	›
⚙	Settings	›

⌂	☼	●
Home	Smart	Me

5

Notice

Please check if light bulbs are damaged caused by transportation. If yes, please contact us for replacement.

Please follow the instruction and notice to keep products in a good and safe use condition.

Please be advised that our smart bulbs need stable 110V input voltage and good wifi signal (2.4GHz band) to work well.

The smart bulb could only be dimmed by APP, Alexa or Google Assistant, NOT by a physical dimmer. Please do NOT install the smart bulb in with-dimmer light fixtures which may cause bulbs to flickerabnormally.

Please keep the product from children as it is made of glass.

CE FC ✉ ♻ 🗑

6